

## FENDER FLARE INSTALLATION INSTRUCTION

CHEVROLET 1500 C/K 88-98 • BLAZER/JIMMY F/S 92-94

SUBURBAN/YUKON 2D 92-99 • TAHOE 2D 95-99

### Parts

Qty (1) Fender Flare Left Front (LF)  
Qty (1) Fender Flare Left Rear (LR)  
Qty (1) Fender Flare Right Front (RF)  
Qty (1) Fender Flare Right Rear (RR)

Qty (1) Rubber Seal (enough for four flares's outer edge)  
Qty (12) U-Clamp with Hex Screw (Hex Key required)  
Qty (8) J-Clip  
Qty (8) Self Tapping Screws (see option B)

### Step 1. Pre-Installation

RF (Right Front)




LR (Left Rear)

DRIVER SIDE

LF (Left Front)

Prefit both driver side and passenger side fender flares to the vehicle before painting or installation. You may remove any moldings, strips or existing flares from the vehicle for fitting or installation. You can cut the fender flare to fit any body side molding.

### Step 2. Painting (optional)

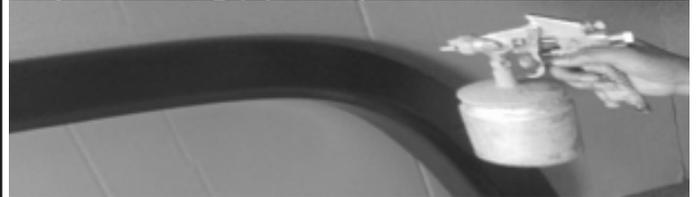

Professional paint or body shop recommended to paint flares. Follow all the paint manufacture specifications to paint the flares. Clean fender flare surfaces with clean water and a mild detergent before painting, do not use lacquer thinner or any solvent based products.

### Step 3. Cleaning




Wash and wipe dry the areas of contact on the vehicle body. Clean the surface and inside edge of the fender flare where the rubber seal is to be attached.

### Step 4. Apply Rubber Seal




Remove about 1 inch of tape liner from rubber seal and apply it to the flare. Start at one end of the flare along the edge that comes in contact with the body panel. Apply pressure on the tape to ensure adhesion, and trim excess rubber seal at the end.

### Step 5. Installation (Left Front Flare Shown)

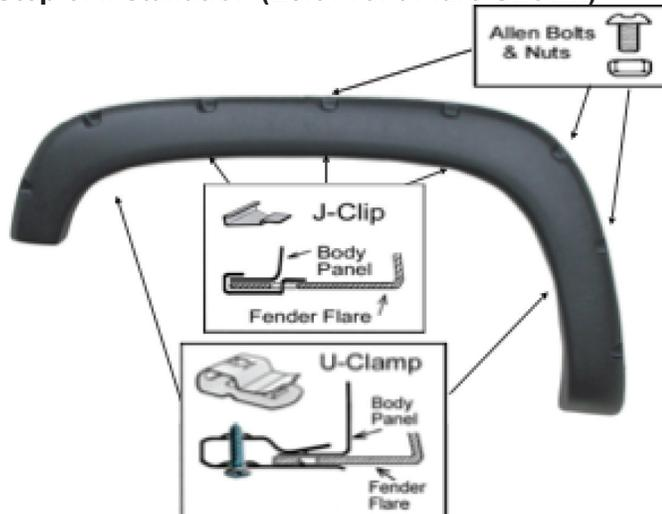

Use torx bit to tighten allen bolt & put firmly on every pocket of the fender flares. **DO NOT OVER TIGHTEN!** Place the flare on the vehicle. Apply 3 J-Clips into the mounting slots in the flare and secure it to the vehicle. Use 2 U-Clamps and secure it into the hole with hex screws as shown.

### Step 6. Installation (Left Rear Flare Shown)

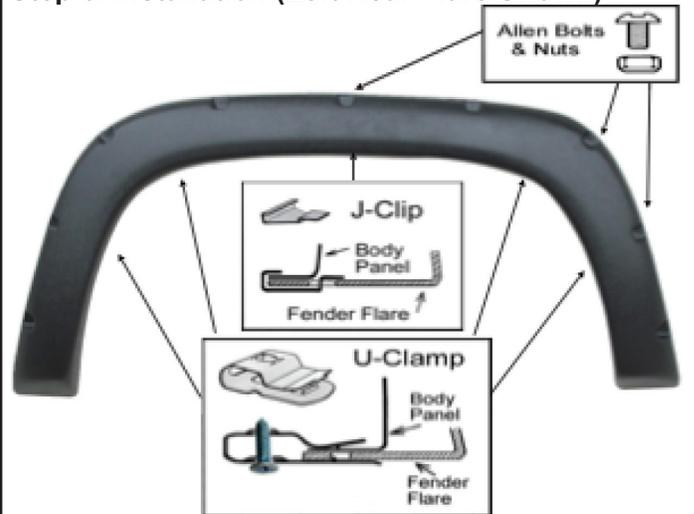

Use torx bit to tighten allen bolt & put firmly on every pocket of the fender flares. **DO NOT OVER TIGHTEN!** Place the flare on the vehicle. Apply 1 J-Clip into the mounting slots in the flare and secure it to the vehicle. Use 4 U-Clamps and secure it into the hole with hex screws as shown.

**Option B:** If condition of fender prevents use of clips and clamps you can use the included self tapping screws to secure the flare to the fender.

855-787-8334

www.trueedgeproducts.com